


GPS/GSM 20-70 25g Transmitter

Microwave Telemetry, Inc.
8835 Columbia 100 Pkwy, Suites K & L
Columbia, MD 21045
USA

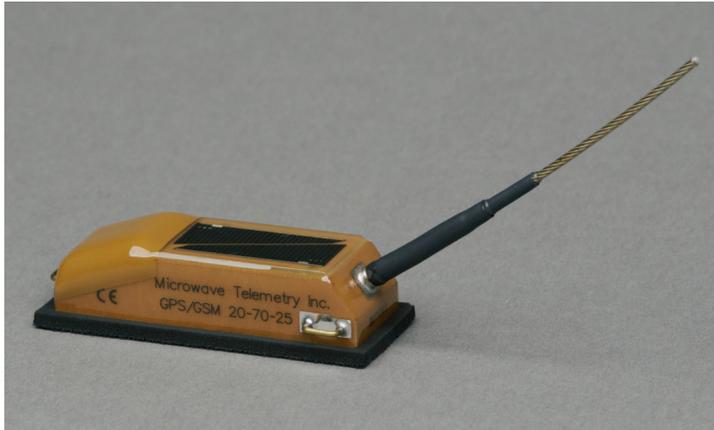

SENSORS

The GPS/GSM 20-70 25g Transmitter includes sensors to measure temperature, battery voltage, and activity. A multi-channel GPS receiver calculates position, altitude, course, speed, HDOP, VDOP, and number of GPS satellites.

GENERAL ELECTRICAL SPECIFICATIONS

Dual Band Frequencies: 850/1900 MHz or 900/1800 MHz
Power output: 2 W
Output impedance: 50 ohms
Quiescent current: <3 μ A
Supply voltage: 3.6–4 volts
Operating temperature range: -15–45°C

Certified by:
FCC
Industry Canada
PCTCRB
CE

* Harnessing loops and neoprene pad not included in these dimensions.
** Neoprene pad not included.

PHYSICAL SPECIFICATIONS

Dimensions*: Length 2.54 in (6.45 cm) x Width 0.92 in (2.34 cm) x Height 0.67 in (1.70 cm)

Weight:** ~25 grams

Antenna: Hard nylon-coated flexible stranded marine-grade stainless steel, 3.35 in (8.51 cm) long, protruding from the back edge of the transmitter 35° to the bottom face


FEATURES

- Solar-powered, rechargeable battery
- Microprocessor-controlled power management
- Internal multi-channel micro-power GPS receiver
- SBAS capable (WAAS, EGNOS, and QZSS)
- GPS horizontal accuracy \pm 18 m
- GPS vertical accuracy \pm 22 m
- GPS resolution 0.00001 degree (~1 meter at the equator)
- Dynamically adjusting GPS fix rate (1-minute minimum with current software version)
- Archive capacity of up to 258,000 locations
- Backpack (with standard neoprene cushioning pad) and leg band*** attachment options available
- Alternative color and matte finish options available
- Operating lifetime up to 3 years

CONSTRUCTION

The housing is constructed from a lightweight glass-reinforced epoxy composite material with a contiguous interior metal-plated coating. The unit is hermetically sealed with a metal-to-metal solder joint providing stability during changes in temperature and humidity.

*** Customer must supply leg band at least 4 weeks prior to scheduled delivery.
Be advised that the combined weight of the PTT and leg band will exceed 25 grams.

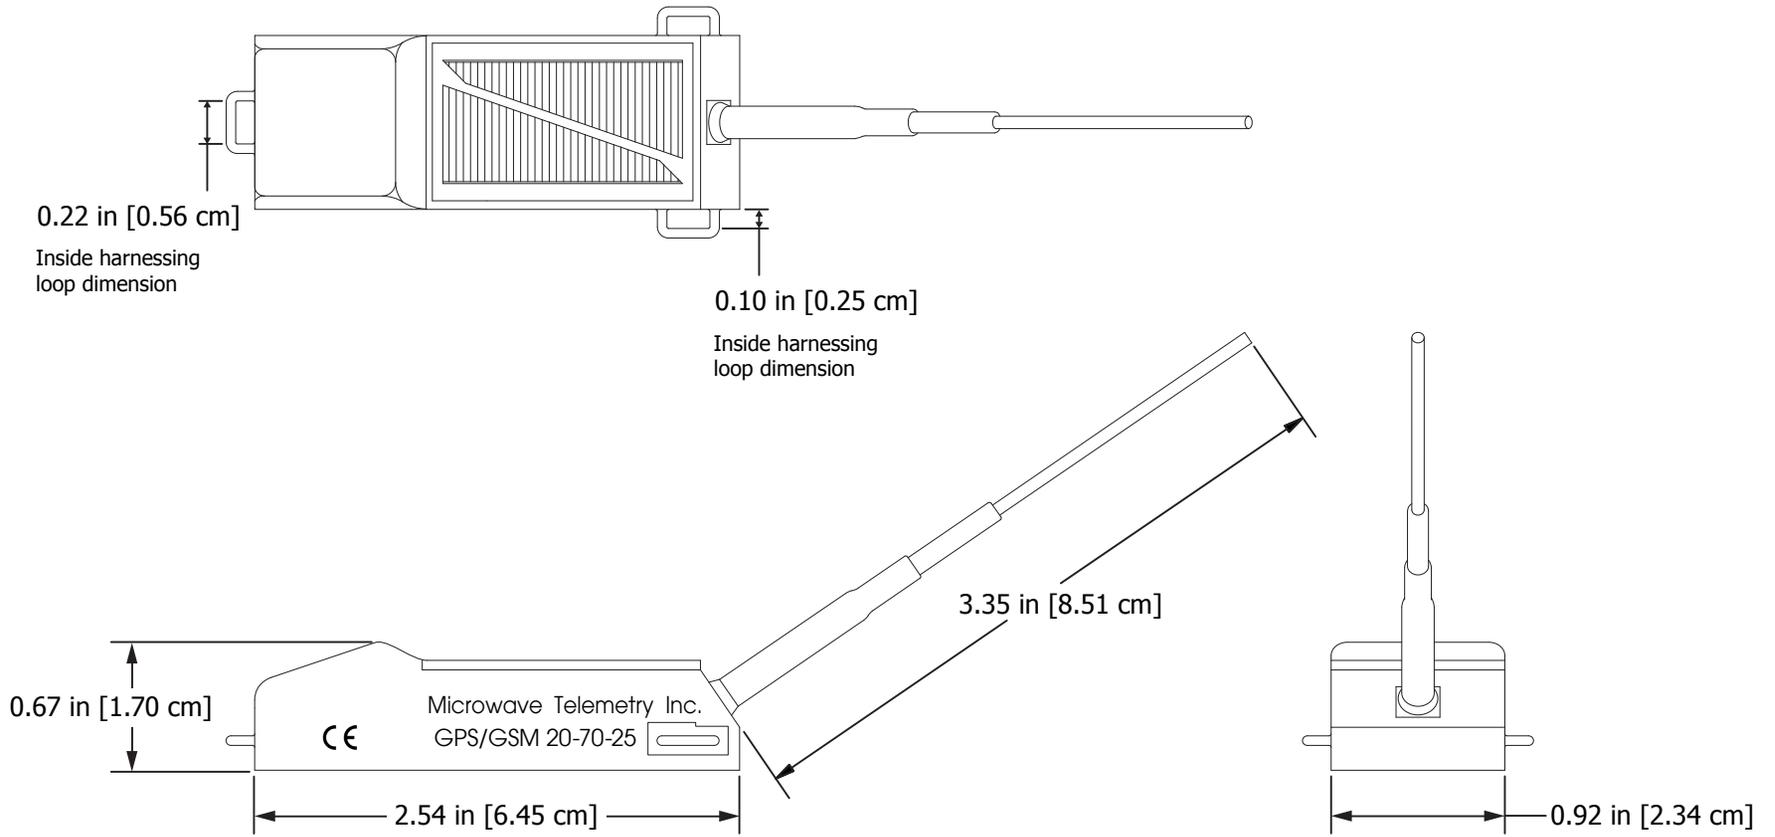

© Microwave Telemetry, Inc.	
GPS/GSM 20-70 25g Transmitter	
10-01-2018	Scale 1:1